

# A Fuzzy Adaptive Control for Double Stator Induction Motor

## Drives

Tahar Laamayad<sup>(1)</sup>, and Farid Nacéri<sup>(2)</sup>, Rachid Abdessemed<sup>(2)</sup>, Sebeti Belkacem<sup>(2)</sup>

<sup>(1)</sup> *Department of Electrical Engineering, University of Ouargla,  
Street Ghardaia, 30000., Ouargla, Algeria*

<sup>(2)</sup> *LEB-Research Laboratory Department of Electrical Engineering, University of Batna,  
Street Chahid Mohamed El hadi Boukhrouf, 05000., Batna, Algeria*

*E-Mail: laamayad\_tahar@yahoo.fr.*

**Abstract**— In this paper a design of the fuzzy adaptive control (FAC) for improving the dynamic response of the double star induction machine (DSIM) is presented, the proposed regulator gives fast dynamic response with no overshoot, it has an important feature of being highly robust, insensitive to plant parameters variations, the design procedure is established to control the speed of the machine, the simulation results show that the controller in enhancing the robustness of control systems with high accuracy.

**Key-Words**— Double Stator Induction Machine, Indirect Filed Oriented Control, Lyapunov Stability Theory, Fuzzy Adaptive Control, Key parameters variation, Robustness.

### I. INTRODUCTION

THE double stator winding induction machine with the squirrel cage rotor was recently shown to give permission in adjustable speed drives and in electric power generation in various application [1],[7],[12], The main difficulty in the asynchronous machine control resides in fact is that complex coupling exists between machine input variables, output variables and machine internal variables as the field, torque or speed, the space vector control assures that the torque has made similar as the one of a DC machine [5], the past few years have witnessed a rapid growth in the number and variety of applications of fuzzy logic, ranging from consumer products, industrial process control [11].

This paper presents the speed control methodology using the indirect rotor flux orientation and the fuzzy-PI approach base on the adaptive control. A fuzzy adaptive control based on the Lyapunov's stability theory for control the double stator induction machine schema is an approach to systematically determine the gains ( $k_e, k_{dce}$ ), while guaranteeing the stability of the control. [19], also the proposed regulator have been successfully used for many numbers of non linear and complex processes, hybrids controllers are robust and their performances are insensible to parameter variations contrary to conventional regulators. Recently several researchers make efforts to improve the robustness and performances of the hybrid control by using adaptive control [19],[25].

### II. MACHINE MODEL

A schematic of the stator and rotor windings for a dual three-phase induction machine is given in [1] and Fig.1. The stator six phases are divided into two wye-connected three phase sets labelled  $A_{s1} B_{s1} C_{s1}$  and  $A_{s2} B_{s2} C_{s2}$  whose magnetic axes are displaced by  $\alpha = 30^\circ$  electrical angle, the windings of each three phase set are uniformly distributed and have axes that are displaced  $120^\circ$  apart, The three phase rotor windings  $A_r, B_r, C_r$  are also sinusoidal distributed and have axes that are displaced apart by  $120^\circ$ , [1],[4],[5].

The following assumptions are made

- Motor windings are sinusoidally distributed.
- The two stars have same parameters.
- Flux path is linear.

The Park model of DSIM presents below in the references frame at the rotating field ( $d, q$ ) [5],[13]

The expressions for stator and rotor flux are:

$$\begin{cases} \varphi_{ds1} = L_{s1}i_{ds1} + L_m(i_{ds1} + i_{ds2} + i_{dr}) \\ \varphi_{qs1} = L_{s1}i_{qs1} + L_m(i_{qs1} + i_{qs2} + i_{qr}) \\ \varphi_{ds2} = L_{s2}i_{ds2} + L_m(i_{ds1} + i_{ds2} + i_{dr}) \\ \varphi_{qs2} = L_{s2}i_{qs2} + L_m(i_{qs1} + i_{qs2} + i_{qr}) \\ \varphi_{dr} = L_r i_{dr} + L_m(i_{ds1} + i_{ds2} + i_{dr}) \\ \varphi_{qr} = L_r i_{qr} + L_m(i_{qs1} + i_{qs2} + i_{qr}) \end{cases} \quad (1)$$

The expressions for stator and rotor voltages are:

$$\begin{cases} v_{ds1} = R_{s1}i_{ds1} + \frac{d}{dt}\varphi_{ds1} - \omega_s\varphi_{qs1} \\ v_{qs1} = R_{s1}i_{qs1} + \frac{d}{dt}\varphi_{qs1} + \omega_s\varphi_{ds1} \\ v_{ds2} = R_{s2}i_{ds2} + \frac{d}{dt}\varphi_{ds2} - \omega_s\varphi_{qs2} \\ v_{qs2} = R_{s2}i_{qs2} + \frac{d}{dt}\varphi_{qs2} + \omega_s\varphi_{ds2} \\ v_{dr} = R_r i_{dr} + \frac{d}{dt}\varphi_{dr} - (\omega_s - \omega_r)\varphi_{qr} \\ v_{qr} = R_r i_{qr} + \frac{d}{dt}\varphi_{qr} + (\omega_s - \omega_r)\varphi_{dr} \end{cases} \quad (2)$$

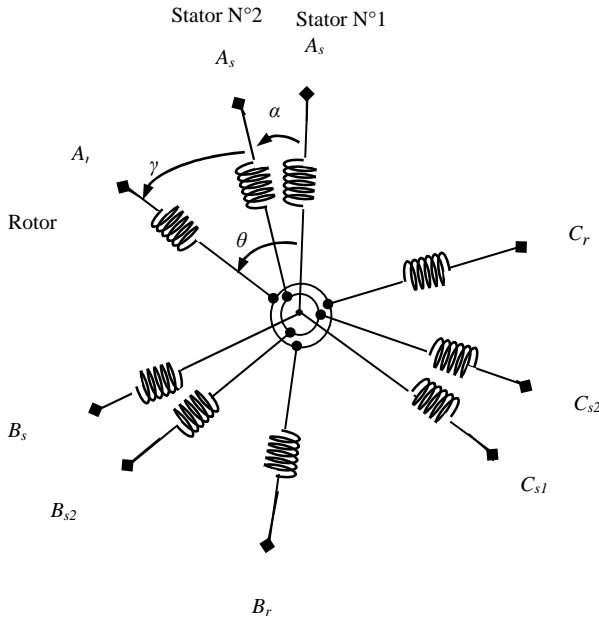


Fig.1. Schematic of the dual star induction machine .

#### A. Mechanical Equation

The mechanical equation is given by [5], [7], [18].

$$\frac{J}{P} \frac{d\omega_r}{dt} = C_e - C_r - \frac{f_r}{P} \omega_r \quad (3)$$

Expression of the electromagnetic torque

$$C_e = P \frac{L_m}{L_m + L_r} [\varphi_{dr} (i_{qs1} + i_{qs2}) - \varphi_{qr} (i_{ds1} + i_{ds2})] \quad (4)$$

$$\text{With: } \frac{3L_m}{2} = L_{ms} = L_{mr} = L_{sr}$$

In the induction machines, rotor winding has a short-circuited hence.

$$v_{dr} = 0, \quad v_{qr} = 0 \quad (5)$$

### III. FIELD ORIENTED CONTROL

The main objective of the vector control of induction motor is as in DC machines, to independently control the torque and flux [17], we propose to study the IFOC of the DSIM, the control strategy is used to maintain the quadrature component of the flux null  $\varphi_{qr} = 0$ , and the

direct flux equals to the reference  $\varphi_{dr} = \varphi_r^*$  Fig.3. ,[2], [9].

The final formula of the electromagnetic torque is:

$$C_{ref} = P \frac{L_m}{L_m + L_r} \varphi_r^* (i_{qs1}^* + i_{qs2}^*) \quad (6)$$

The slip angular frequency is:

$$\omega_{gl}^* = \frac{R_r L_m}{L_m + L_r} \frac{(i_{qs1}^* + i_{qs2}^*)}{\varphi_r^*} \quad (7)$$

Expression of the direct currents:

$$i_{ds1}^* + i_{ds2}^* = \frac{\varphi_r^*}{L_m} \quad (8)$$

### IV. FUZZY LOGIC CONTROL

#### A. Fuzzification

The most common controller has two inputs: error and the derivative of the error with respect to a defined reference signal, and one output, which is usually the command, [26].

The error is given:

$$e(t) = \omega_{ref} - \omega_r(t) \quad (9)$$

$$e(t) = k_e e_n(t) \quad (10)$$

The derivative of the error:

$$\frac{de(t)}{dt} = k_{de} \frac{de_n(t)}{dt} \quad (11)$$

#### B. Fuzzy inference engine

The fuzzy rule consists of the antecedent-consequent pair is expressed by IF-THEN rules codified in a lookup table.1. The input-output mapping is an inference mechanism based on Zadeh logic .

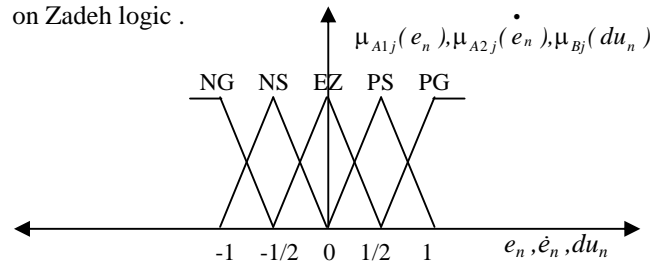


Fig.2. Membership functions of inputs ( $e_n$  and  $\dot{e}_n$ ), and output  $du_n$ .

#### C. Fuzzy control rules

The resulting fuzzy inference rules for the one output variable  $du_n(t)$  are as follows:

Table .1 The fuzzy inference mechanism  $du_n(t)$ .

		$\dot{e}_n$				
		NG	NS	ZE	PS	PG
$e_n$	NG	NG	NG	NS	NS	EZ
	NS	NG	NS	NS	EZ	PS
	ZE	NS	NS	EZ	PS	PS
	PS	NS	EZ	PS	PS	PG
	PG	EZ	PS	PS	PG	PG

#### D. Defuzzification

The centre of area defuzzification can calculate the crisp value of the output  $du_n$  as [8]

$$du_n(t) = \frac{\sum_{j=1}^{25} \mu_{A1j}(e_n(t)) \mu_{A2j}(\dot{e}_n(t)) C_j S_j}{\sum_{j=1}^{25} \mu_{A1j}(e_n(t)) \mu_{A2j}(\dot{e}_n(t)) S_j} \quad (12)$$

$C_j, S_j$  are real value parameters representing the centre and surface of the membership function  $\mu_{Bj}(du_n(t))$  .

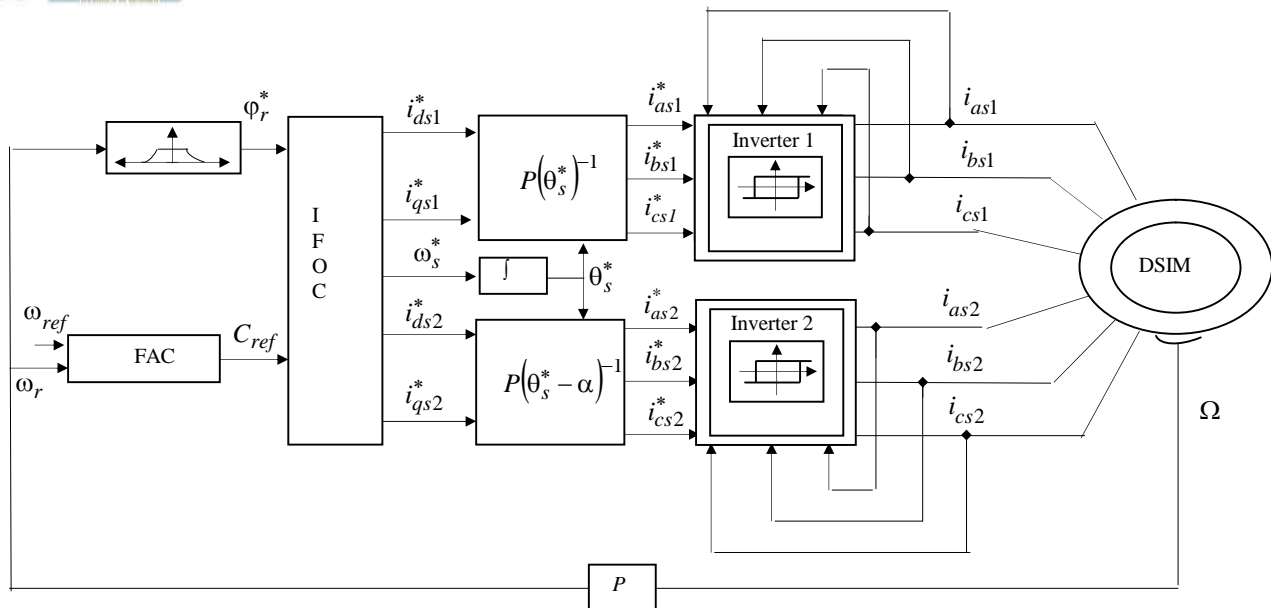


Fig. 3. Speed Control of DSIM by using the fuzzy adaptive control .

#### V. ADAPTIVE CONTROL

The adaptive control system can be represented by fig.4. It is composed of two parts: a FLC containing unknown gains  $k_e$  and  $k_{dce}$ , an adaptation mechanism for updating the adjustable gains in FAC [15], [16],[6]. [22],

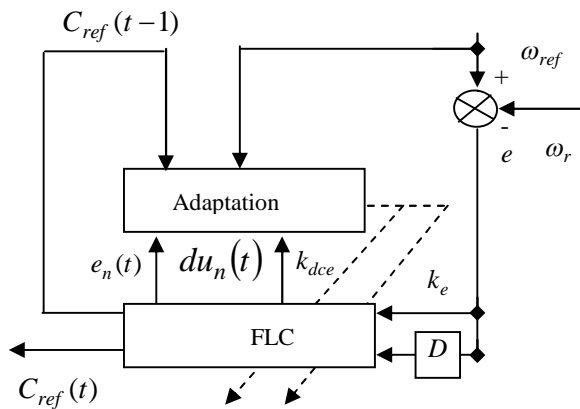


Fig.4. The block diagram of the FAC.

##### A. Choice of control law

As a first step in the adaptive control design, let us choose this law:

$$C_{ref}(t) = C_{ref}(t-1) + k_{dce} du_n(t) \quad (13)$$

The closed-loop dynamics are:

$$\begin{aligned} \dot{\omega}_r(t) = & -a_p \omega_r(t) + b_p C_{ref}(t-1) + \\ & b_p k_{dce} du_n(t) - d_p C_r \end{aligned} \quad (14)$$

In our adaptive control problem since  $k_{dce}$  and  $k_e$  are unknown, the control input will achieve these objectives adaptively.

*B.Choice of adaptation law by using the Lyapunov stability theory:*

Let us now choose the adaptation law for the gains  $k_{dce}$  and  $k_e$  by using Lyapunov method,

We consider candidate function:

$$V = \frac{1}{2} \left( e^2 + \frac{1}{\gamma_1} k_e^2 + \frac{1}{\gamma_2} k_{dce}^2 \right). \quad (15)$$

Where :  $A = (a_p \omega_{ref} - b_p C_{ref}(t-1))$ .

If the gains are updated as

$$\begin{cases} \dot{k}_e = -\int \gamma_1 e_n |A| dt \\ \dot{k}_{dce} = \int \gamma_2 b_p k_e e_n du_n(t) dt \end{cases} \quad (16)$$

Where  $\gamma_2$  and  $\gamma_1$  are constants positive.

We get

$$\frac{dV}{dt} = -a_p K_e^2 e_n^2 \quad (17)$$

In last conditions the proposed control schema is an approach to systematically determine the gains  $k_{dce}$  and  $k_e$  of the fuzzy-PI logic, while guaranteeing the stability of the control and DSIM.

#### VI. RESULTS AND DISCUSSIONS

Fig.5. illustrates the performances of control, we have simulated the starting mode of the motor without load, and

the application of the load ( $C_r=21\text{N.m}$ ) at the instance  $t=0.5$  s and it's elimination at  $t=1$  s .

After that we are applying the load ( $C_r=-14\text{N.m}$ ) at the instance  $t=1$  s and it's elimination at  $t=1.5$  s.

Moreover, the inversion of value of the load ( $C_r=14\text{N.m}$ ) at the instance  $t=1.5$  s and it's elimination at  $t=3$  s.

The parameters variation in tests can be interpret in practice by the bad functioning conditions as overheating and variation of the inertia.

Fig.6. shows the tests of robustness realized with the FAC control in the case of variation of speed step of  $-100$  (rd/s) at  $t=1$  s .In addition we minimization the speed  $10$  (rd/s) at the instance  $t=2.5$  s.

1)-Fig.7. Shows variation of  $J_r=1.5*J_n$  on rotor inertia.

2)-Fig.8. Shows variation of  $R_r=1.5*R_m$  on rotor resistance.

Fig.9. we have simulated the system with a different new technique of control considered and compared to FLC-PI , the control presents the best performances, to achieve tracking of the desired trajectory and to reject disturbances , the decoupling of flux has maintained in permanent mode. The tests show that an increase of the resistance and the inertia in steady state mode does not have any effects on the performances of the technique used. Consequently, the performances of speed control are approximately like the nominal case.

## VII. CONCLUSION

A speed control scheme of a dual stator induction machine with the fuzzy adaptive control has been proposed. The principles of Lyapunov stability theory have been applied to the fuzzy PI control design such that the determine gains  $k_e$  and  $k_{dce}$  are depending on the stability of control. Classic fuzzy logic design methods are then used for the design of the fuzzy-PI controller.

Traditionally the design of a fuzzy logic controller is dependent on the explicit description often the gains of fuzzy-PI control undetermined with analytic method.

In FAC control schema is an approach to systematically determine the gains fuzzy-PI, while guaranteeing the stability of the control.

The effectiveness of the control scheme was validated with simulation results; the different simulations results obtained show the high robustness of the controller in presences of the parameters variations as the rotor resistance, the inertia and the load, reference speed. The control of the speed gives fast response with no overshoot, the decoupling of the flux; stability and convergence to equilibrium point are verified. The hybrid regulators has a very interesting dynamic performances compared with the fuzzy PI controller.

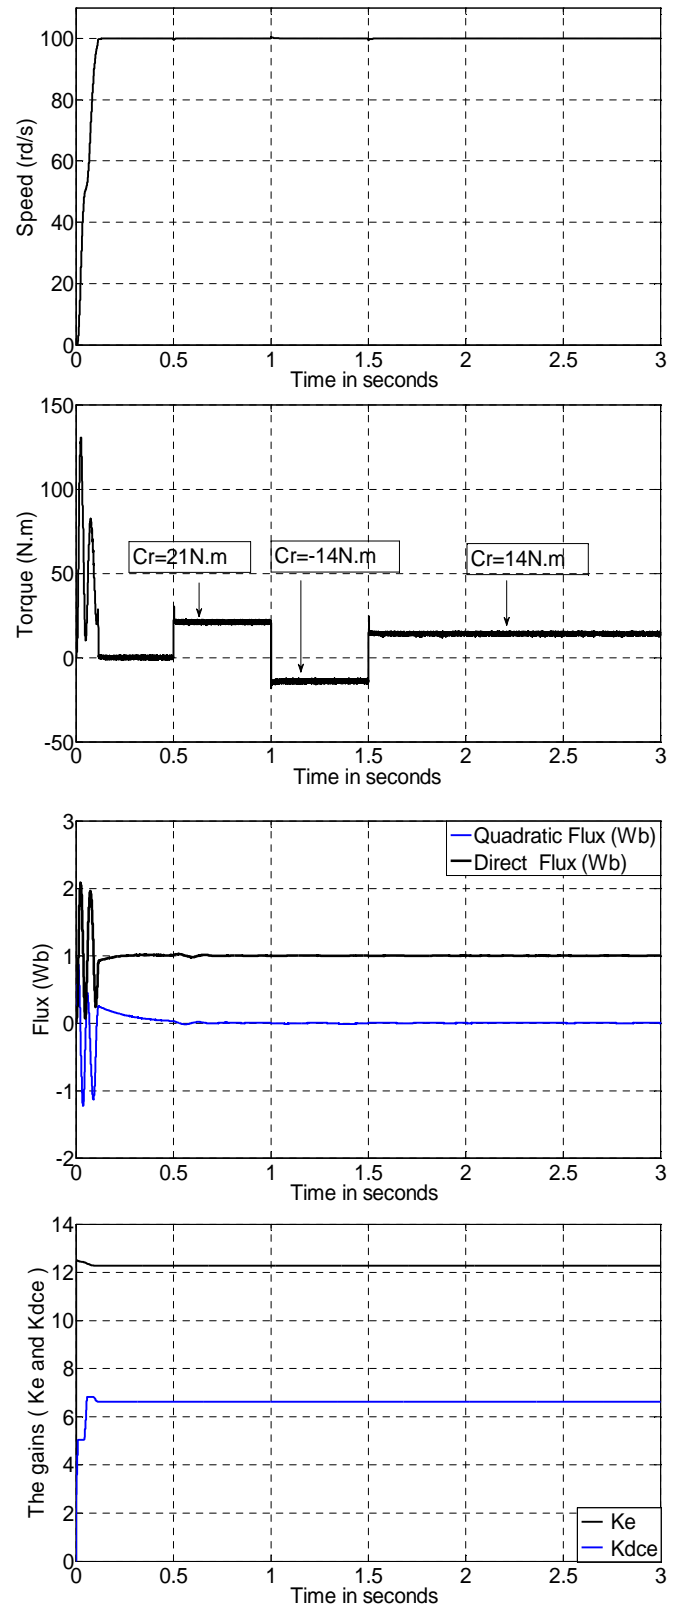


Fig.5. Test of robustness for different values of the load when DSIM is operated at 100 (rd/s) .

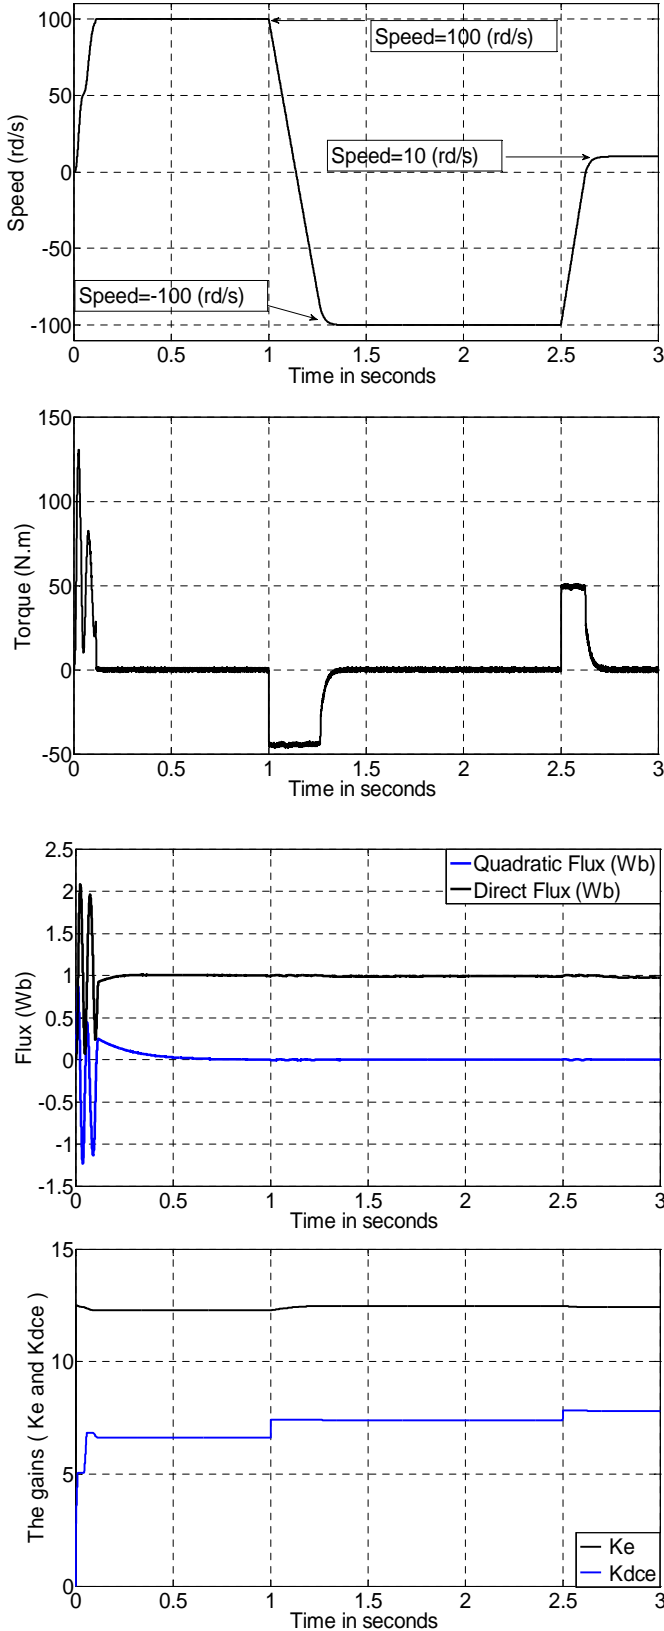


Fig.6. Test of robustness for different values of the speed 1) 100 (rd/s) is applied at 0 (s), 2) -100 (rd/s) is applied at t=1 (s), 3) 10 (rd/s) is applied at t= 2.5 (s).

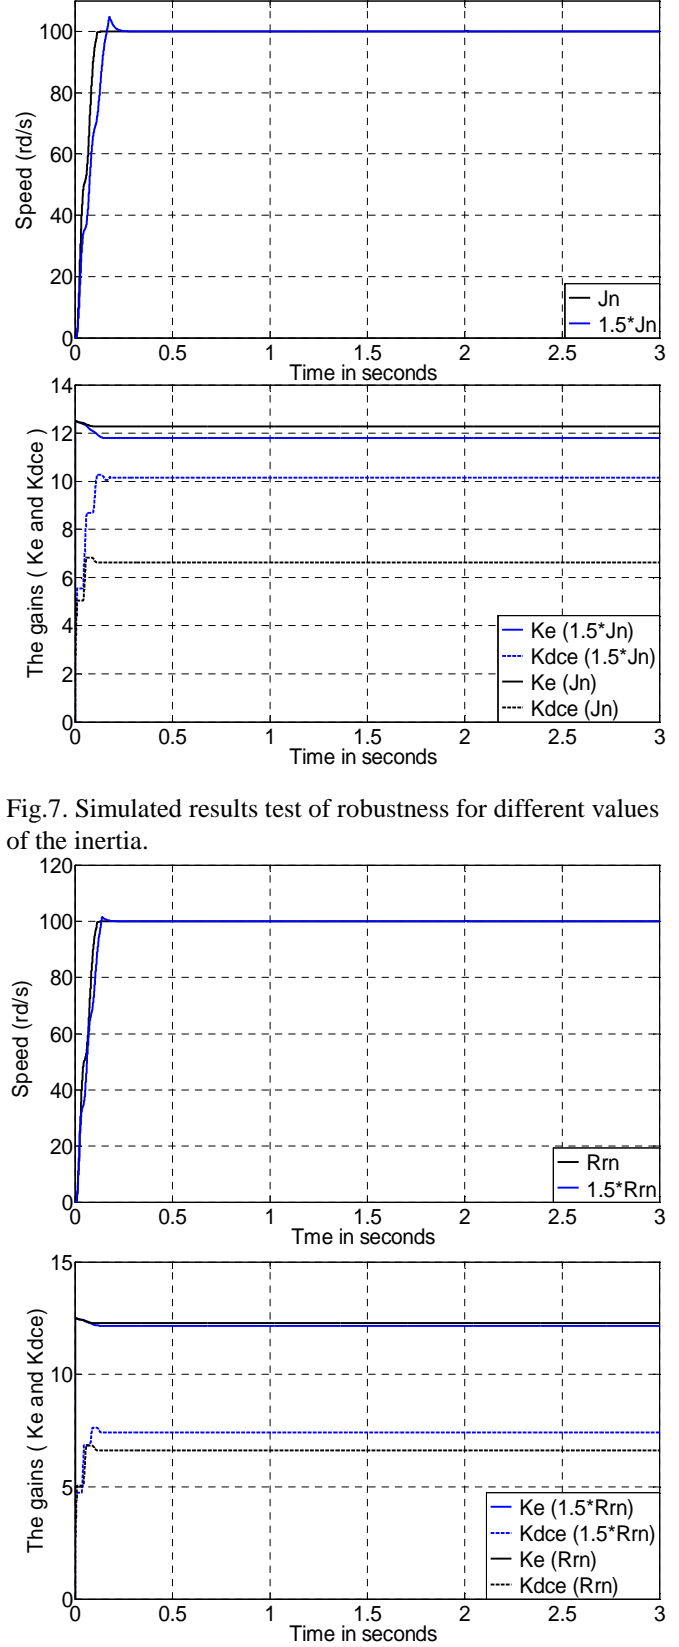


Fig.7. Simulated results test of robustness for different values of the inertia.

Fig.8. Simulated results test of robustness for different values of the rotor resistance.



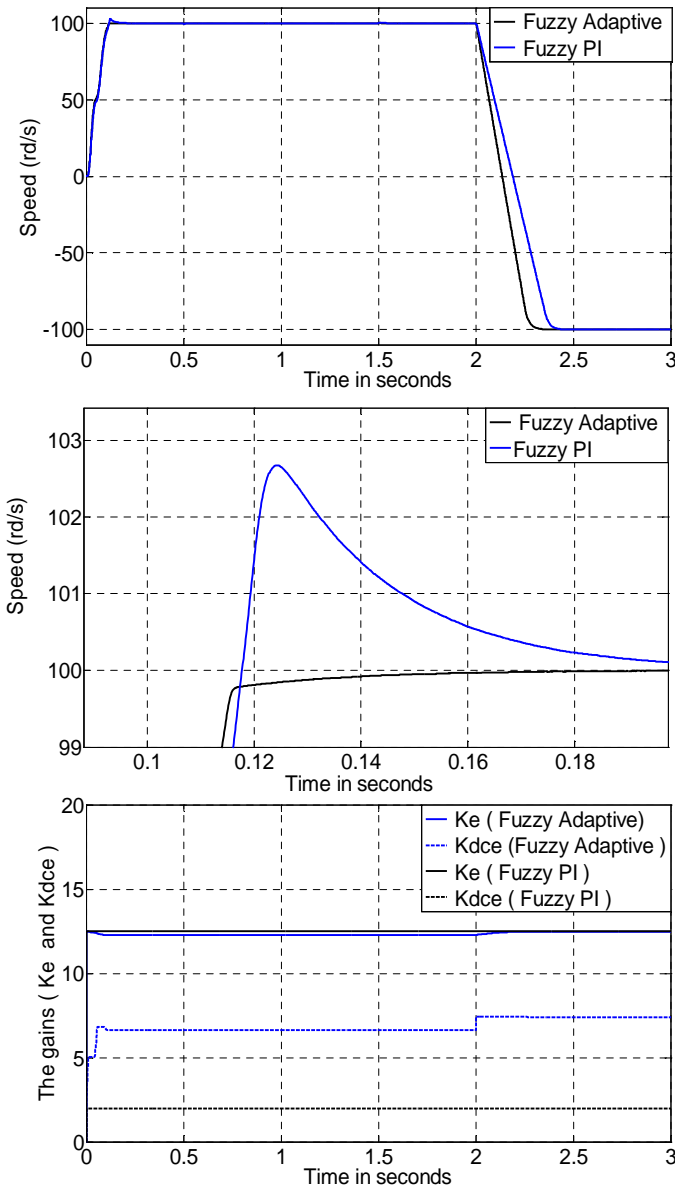


Fig.9. Simulated results test of robustness the Fuzzy Adaptive Control and Fuzzy-PI.

#### REFERENCES

[1] D. Hadiouche, H. Razik and A. Rezzoug, "On the modeling and esign of dual-stator windings to minimize circulating harmonic currents for VSI fed C machines," *IEEE Trans. Ind. Appl.*, vol. 40, no. 2, pp. 506–515, March/April 2004 .

[2] G. K.Singh,K.Nam and S.K.Lim, " A simple indirect field-oriented control scheme for multiphase induction machine," *IEEE.Trans.Ind.Elect.*,vol.52,no.4, pp. 1177–1184, August 2005.

[3] K.Rajani,N. Mudi,R.Pal "A Robust Self-Tuning Scheme for PI- Type And PD-Type Fuzzy Controllers," *IEEE.Trans.Fuzzy.Syste.*vol.7,no.1, pp. 2–16, February 1999.

[4] D.Hadiouche"Contribution à l'étude de la machine asynchrone double étoile modélisation, alimentation et structure,"*Thèse de doctorat.* Université Henri Poincaré Nancy-1, Soutenue le 20 décembre 2001.

[5] G.Séguier, "Electronique de Puissance", *Editions Dunod* 7<sup>ème</sup> édition. Paris, France, 1999.

[6] Y.Fu,"Commande découplées et adaptatives des machines asynchrones triphasées," *Thèse de doctorat*, Université MontpellierII,1991.

[7] G Feng, "A survey on analysis and design of model-based fuzzy control systems," *IEEE.Trans.Fuzzy. System.* Vol.4, No.5, pp.676–697, October 2006.

[8] J. godjevac," Idées nettes sur la logique floue," *Editions Presses Polytechniques et Universitaires Romandes*, Suisse, 1980.

[9] A. Kalantri, M. Mirsalim and H. Rastegar, "Adjustable speed drive based on fuzzy logic for a dual three-phase induction machine," *Electric Drives II, Electrimsacs.* August 18–21, 2002.

[10] D.Berber,E.M. Berkouk, A.Talha and M. O. Mahmoudi, "Study and control two two-level PWM rectifiers-clamping bridge-two three-level NPC VSI cascade. Application to double stator induction machine," *35<sup>th</sup> Annual.IEEE.Electronics.Specialists.Conference*,pp. 3894–3899, Aachen, Germany, 2004.

[11] Lotfi.Zadeh "Fuzzy Logic: Issues, Contentions and perspectives" *IEEE .Trans. Ind. Elect.* vol. 35, no 2, pp. 253–262, May 1988.

[12] B.widrow, "pattern recognition and adaptive control," *IEEE.Trans,Appl.Ind.*, Vol.AI\_83,no.74,p.269,1964.

[13] G.N.Saridis,J.M.Mended,andZ.Z.Nikolik, "Reporton definitions of self-organizing control processes and learningsystems," *IEEE.contro.system.Soc.Newsletter* ,Spring ,1973.

[14] K.J.Astrom, "Theory and applications of adaptive –A survey," *automatica*, Vol.19, pp.471–487,1983.

[15] J.Jacques and Estoline .Weiping li "Applied Nonlinear Control" *prentice hall, Englewood cliffs* .New jersey 07632.1991 .

[16] G.Grellet,Guy.Clerc "actinneurs électriques – principes / modèles / commande " *Collection électrotechniques* .Eyrolles 1997 .

[17] H.Amimeur ,R.Abdessemmed,D.Aouzellag,E.Merabet and F.Hamoudi. "A sliding Mode Control associated to the Field oriented Control of Dual stator Induction Motor Drives" *Journal. Engineering .Electrical*, Vol 10,Edit 3,No 2,pp7-13,2010.

[18] E.Merabet H.Amimeur F.Hamoudi,and R.Abdessemmed, " Self-Tuning Fuzzy Logic Controller for a Dual Star Induction Machine" *K.I.E.E.* Vol 6, No 1, pp133-138, 2011.

[19] S.Filizadeh, L.M.Safavian ,and A.Emadi "Control of Variable Reluctance Motors ;A Comparison Between Classical and Lyapunov-based Fuzzy Schema " *Journal of power electronics*, Vol 2, No 4,pp 305-311,2002.

[20] H.Ying ,W.Siler and J.J.Buckly " Fuzzy Control Theory \_anonlinear case" *Automatica*, Vol.26,pp.513-520,1990.

[21] G.Chen and H.Ying, "Stability Analysis of nonlinear Fuzzy PI Control systems " *Industrial.Fuzzy.Control.and Intell .System*.Third Inter.Confe .1-3 Dec 1993,pp128-133.

[22] K.Johan Astrom "Adaptive Feedback Control" *Proceeding of the IEEE*, Vol.75, No.2, February 1987 .

[23] B.Ferdi,C.Benachaiba,S.Dib,R.Dehini "Adaptive PI Control of Dynamic Voltage Restorer Using Fuzzy Logic " *Journal. Engineering. Electrical* .Vol10, Edition 4,No19 , pp142-151.2010.

[24] ShanthiB and NatarajanS.P,AnbukodiS.P, "Fuzzy Logic Control for Signal Phase Multilevel Inverter" *Journal.Engineering.Electrical*. Vol08, Edition4,No8,pp55-61,2008.

[25] Precup,R-E;Preitl,S. " Popov-type stability analysis method for fuzzy control system" *in Proc.EUFIT97*, ,Aachen,Germany ,8-11 September 1997,pp.1306-1310.

[26] G.Calcev,C.Greco,B.Bona "Fuzzy Controller Synthesis Using Sliding Mode Approach " *NAFIPS/IFIS/NASA '94Proceeding of Proceedings of the First International Joint Conference of the North American Fuzzy Information Processing Society Biannual Conference. The Industrial Fuzzy Control and Intelligent Systems Conference, and the NASA Joint Technolo* , *IEEE*, pp.255-258 ,18-21 Dec 1994.