

Study of wastewater treatment for an agricultural reuse

KAREF Salah¹, AZLAOUI Mohamed¹, FODILI Mokhtar², KETTAB Ahmed³

¹ Laboratoire de modélisation optimisation et simulation des systèmes complexes réels, Université de Djelfa,

² Laboratoire de chimie organique et substances naturelles, Université de Djelfa,

³ Professeur des universités / Expert Consultant international.

E-Mails: karef_salah@yahoo.fr

Abstract— In the framework of sustainable development, it is imperative to rationalize the use of water resources conventional and unconventional. That is why the re-use agricultural of by-products of the treatment is an alternative expected to preserve the environment and promotion of the agricultural sector.

The present work aims to characterize sludge and the treated waters of the WWTP of Medea and assess their potential and fitness for agricultural use. The physico-chemical and bacteriological results revealed that for sludge, the C/N found indicates important nitrogen availability. This report is related to the low amount of organic matter it contains. For treated water of the WWTP to the current state are highly charged with fecal coliforms and can not be reused without chlorination and their high salinity limits their reuse for certain crops.

Key-Words— *Treated water, Sludge, Reuse, Agriculture, Fertilizer input.*

I. INTRODUCTION

In Algeria, freshwater resources are scarce and vulnerable [1]. In contrast, wastewater production increases and their reuse are as a first response to this situation of water shortage for irrigation. The wastewater Treatment generates the treated water and the sludge that are potentially reusable in agriculture according to their determinative composition and their fertilizer inputs.

It is in this context that this study focuses essentially on the potentiality of agricultural reuse of treated wastewater and sludge generated by the WWTP of Medea city.

II. MATERIALS AND METHODS

With the aim to assess the potentiality of

agricultural reuse of these byproducts. A study period of 12 month was chosen during the year 2013. The samples of sludge and water were analyzed in the laboratory of WWTP.

III. RESULTS AND INTERPRETATIONS

The results of analyzes carried out on different samples of sludge and treated water are presented and interpreted for the two fields as follows:

III.1. Sludge field

III.1.1. Mohlman index MI

The MI measures the behavior of sludge in biological reactor (BR). Indeed, the MI values of between 50 to 150 ml / g, ensure good sludge settleability. Below 50 ml/g, the sludge risk to form deposits. Beyond 150 ml/g, we risk of having the phenomenon of bulking [2]. The mean value of IM found 52.12 ml/g reflects a good availability of mud settling.

III.1.2. Dryness of the sludge

We obtain a sludge at different percentages of dryness: liquid sludge (4-10%), pasty sludge (10 to 25), solids sludge (25-50%), granulated sludge or in powder for a dryness higher than 85% [3], which gives the solid character of the WWTP sludge of Medea, for a mean dryness found of 45%.

III.1.3. Organic matter

The sludge of the Medea WWTP contains 58% of organic matter in the dry matter, it is a coherent value with the report C/N found of 8. Once spread on the soil, the micro-organisms present in the soil degraded in part organic matter provided by the sludge and transforms them into mineral elements

available to the plant. Another part of the organic matter is incorporated into the soil and contributes to the maintenance of a favorable structure for root development [4].

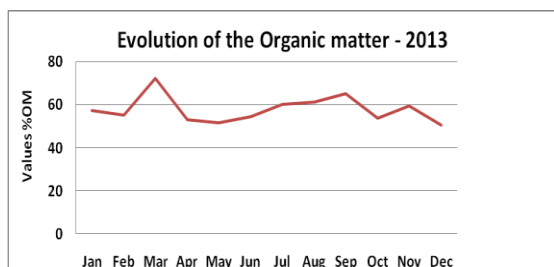


Fig 1. Graphic representation of the evolution of the Organic matter in sludge of WWTP Medea

III.1.4. Ratio C/N

It is recognized that organic fertilizers having C/N ratios below 20 are mineralized quickly and can release significant amounts of nitrogen to crops [5]. The C/N ratio of the sludge is 8 less than 10. Therefore, the mineralization of the organic matter contained in the sludge should begin short time after land application, thus making it available quickly large quantities of nitrogen at cultures. The nitrogen in sewage sludge is quickly released for use by the plant. Carbon is quickly assimilated by soil microorganisms and does not maintain the soil humus stock [6].

III.1.5. Potassium

Indeed, potassium excreted in the urine, being very soluble, tends to stay in solution in wastewater and be released into the treated effluent [5].

Sludge samples analyzed in the laboratory gave an average concentration of potassium (K_2O) of 0.22% of the dry matter, it is a low value. According to [6], this sludge can be advantageous for fodder cultivation in soils naturally rich in potassium.

III.1.6. Phosphorus

For a spreading of sludge, phosphorus migrates very slowly to the tablecloth or surface water

because according to [7], phosphorus is strongly adsorbed to soil particles. The phosphorus (P_2O_5) assayed in our samples, representing 0.37% of the dry matter, it is an interesting contribution and can cover crop needs and there is no risk of leaching.

III.1.7. Metal trace elements

Analysis of samples of sewage sludge during 2013, have given the following results in table I. The low contents found of metals trace elements in sludge of WWTP Medea compared to regulatory limits do not cause any negative effects in their land application.

Table I. Results of analysis of MTE in the sludge of the WWTP Medea

MTE	Concentration (mg/kg of DM)*	Regulatory limit values
Fe	1200	/
Mn	82.36	/
Cd	0.52	10
Cr	11.52	1000
Cu	43.38	1000
Ni	14.09	200
Zn	260	3000
Cr+Cu+Ni+Zn	329	4000

III.2. Water field

III.2.1. Pathogens

The average load of fecal coliforms of treated water is 18.85×10^4 CFU / 100ml and 10.32×10^4 CFU / 100ml for fecal streptococci. We note that the concentrations of Fecal Coliforms are quite high in well above standard retained by WHO for irrigation water which is ≤ 1000 cfu / 100 ml [8]. Which takes us to consider that these treated water is unacceptable for irrigation

III.2.2. Electrical conductivity (EC)

The electrical conductivity is probably one of the simplest and most important for the quality control of waste water. It translates the degree of overall mineralization; it provides information on

the salinity. The average values of the recorded electric conductivity vary from 2390 $\mu\text{S}/\text{cm}$ at the inlet and 2295 $\mu\text{S}/\text{cm}$ at the outlet. These values confer on the water according to [9], a slight to moderate irrigation restrictions. The effluents of the WWTP of Medea are very high salinity and belong to classes IV which agricultural use is possible on particularly resistant crops [10].

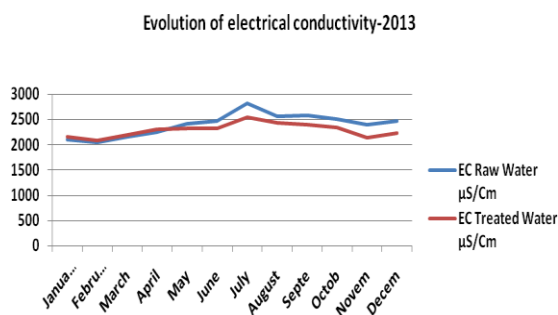


Fig. 2. Graphic representation of the evolution of the EC at the inlet and at the outlet of the WWTP

III.2.3. Total Suspended Solids (TSS)

The raw water registers a TSS of 810 mg / l, against a concentration of 25.4 mg / l in the treated water; it means a treatment yield of 97%. The treatment of particulate pollution is very effective at the WWTP especially if we consider that the standards of TSS for the rejection of treated water is <30 mg / l according to the USEPA recommendations [11].

III.2.4. Biological oxygen demand (BOD₅)

According to [12], the organic matter has an adsorption capacity of the chemical elements (cations and anions) ten times as clay; and no doubt, organic matter Helps improve soil structural stability by relaunching the soil microbial activity and increasing water retention. For BOD₅, the average recorded concentration varies from 450 mg/l at the inlet to 20 mg/l at the outlet of the WWTP, giving a treatment yield of 95.5%. The concentration of BOD₅ to the outlet-is less than 30 mg / l, a limit value required by the recommendation of the USEPA [11].

III.2.5. Chemical oxygen demand (COD)

The COD registered at the inlet to the WWTP is 699 mg/l, against a value of 95mg/l recorded at the outlet, this gap shows the abatements pushed in the treatment process ie 86.4% of yield,

III.2.6. SAR (sodium adsorption ratio)

The SAR which expresses the relative activity of sodium ions in exchange reactions in soils, it influence the salinization of the soil and the infiltration rate which is a function of salinity (electrical conductivity and SAR [13].

The ionic species of SAR, when analyzed, have given the following results $[\text{Na}^+] = 90 \text{ mg / l}$, $[\text{Ca}^{++}] = 101 \text{ mg / l}$ and $[\text{Mg}^{++}] = 35 \text{ mg / l}$ which gives an SAR of 1.96.

According to the FAO guidelines cited by [14] for water with SAR between 0 to 3 and conductivity higher at 700 $\mu\text{S} / \text{Cm}$, the degree of restriction on the use in irrigation is zero. We must therefore take into account two factors, salinity and SAR, to assess the impact of the irrigation water quality on the infiltration speed.

III.2.7. Fertilizers

The nutrients being in large quantities in the waste water, which are important in agriculture, are nitrogen, phosphorus, and sometimes potassium.

III.2.7.1. Nitrogen

After treatment, the nitrogen in the treated water is found in oxidized form ammonia (NH_4^+) and nitrate (NO_3^-). Laboratory analyzes have shown an inverse proportionality between the two forms with a concentration of NH_4^+ ranging from 25 mg / l to 3 mg / l from the inlet to the outlet, unlike NO_3^- nitrates which are 4 mg / l at inlet and 19 mg / l at the outlet, this is due to the nitrification which oxidizes NH_4^+ in NO_3^- . The treated water of the WWTP Medéa, according to FAO guidelines [14] , [15] that specifies nitrates NO_3^- water concentrations ranging from 5 to 30 mg/l , are in the restriction interval of lightweight agricultural use to moderate .

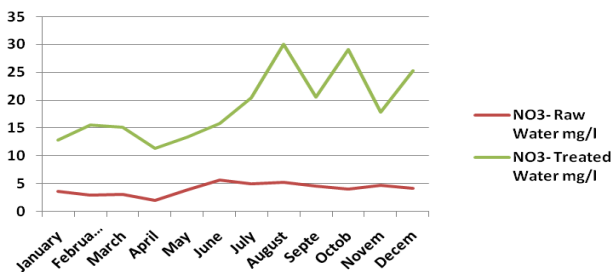


Fig. 3. Graphic representation of the evolution of NO₃⁻ at the inlet and the outlet of the WWTP-2013

III.2.7.2. Phosphorus

The water analysis results show that the phosphates vary from 3.6 mg/l from WWTP inlet to 2 mg/l at its outlet; it is a usual value in the irrigation water.

III.2.7.3. Potassium

The results of the analysis of treated water gave an average potassium concentration of 18 mg/l; is considered a normal value and without any negative effect because according to [16] the potassium content in wastewater does not cause harmful effects on plants or the environment. It is an essential macronutrient that favorably affects soil fertility, crop yield and their quality.

III.2.8. Metal trace elements

According to [17], when processing wastewater in treatment plants, most of the metal is retained in sewage sludge. Iron and Manganese are heavy metals interesting and do not pose a health problem [18].

Analysis of treated water samples has given the contents of Fe and Mn respectively 1.3 mg/l and 0.19 mg/l. These very trace contents are below that the thresholds set by FAO [16] and will have no toxic effect on either the ground or on the plant. And for copper and zinc according [18] are interesting metals for plants and posing a health problem. Based on the analyzes, their contents in the treated water are respectively, 0.07 mg/l, and 0.15 mg/l. These are negligible values compared to the threshold set by the FAO.

IV. CONCLUSION

The main objective of our work was for an eventual exploitation of unconventional resources, to examine the potentiality of agricultural reuse of sludge and treated water from the Medea WWTP by characterization of its byproducts during the year 2013, which gave for the two fields:

Sludge field:

The monitoring of parameters analyzed sludge shows that the organic matter is 58% of the dry matter; this value is consistent with the C/N ratio found to 8. Thus, the mineralization of the organic matter contained in sludge should begin short time after land application, thus making it quickly available large quantities of nitrogen to crops. The nitrogen in sewage sludge is quickly released for use by the plant. The Carbon is rapidly assimilated by microorganisms of the soil and does not maintain the soil humus stock.

For the Potassium (K₂O), a quantity of 0.22% in the sludge is a low value. This sludge can be advantageous for fodder cultivation in naturally rich soils in potassium. An amount of phosphorus (P₂O₅) of 0.37% can cover crop needs and causes no risk of leaching.

The low contents of metal trace elements in sewage sludge of Medea do not cause any negative effects on their land application.

Water field:

In the absence of chlorination at the outlet of the WWTP, the concentrations of Fecal Coliforms are quite high and lead us to consider that the treated water is unacceptable for irrigation and is potentially reusable, once that chlorination is put into operation.

A mean conductivity of 2295 μS/cm at the outlet of the WWTP gives to the water a restriction slight to moderate in irrigation. The WWTP effluents of Medea have a very high salinity whose agricultural use is possible on particularly resistant crops.

The nitrates of treated water have a concentration of 19 mg/l which confers them a restriction for agricultural use, mild to moderate. The phosphates

at the outlet of the WWTP have a concentration of 2 mg/l, which is a usual value in the irrigation water. A potassium concentration of 18 mg / l in the treated water does not cause harmful effects on plants or the environment. It favorably affects soil fertility, crop yield and their quality.

REFERENCES

- [1] A. Kettab, R. Metiche, N. Bennacar, Water for sustainable development: Issues and strategies, *Water Sci.* 21 (2008) 247–256.
- [2] Ahmed YAGOUBI, Verification and Validation of Adequacy & Effectiveness exploitation of Projects WWTP - Lebanon, Morocco and Tunisia (2020), MeHSIP-PPIF program, Sustainable Water Integrated Management, Support Mechanism (SWIM - SM), 2014.
- [3] ADEME, 1996. The nitrogen value of sludge from municipal wastewater treatment plants, Agency for Environment and Mastery of Energy, France 336 p.
- [4] N'Dayegamiye, A., A. Drapeau, S. Huard and Y Thibeault. (2004). "Integration of mixed sludge and manure in agricultural rotations: Answer of cultures and interactions with soil properties." *Agrosol*, 15 (2), p. 83-90.
- [5] Bipfubusa, M., A. and H. Antoun N'Dayegamiye. (2006). "Effects Assessment of fresh mixed sludge and their composts on crop yields and their mineral nutrition." *AgroSolutions*, 17 (1), p. 65-72.
- [6] Pierre-François van de Kerchove Chaballier Virginia Hervé Saint Macary, Guide of organic fertilization at Reunion, Chamber of Agriculture of Reunion, CIRAD, 2006, ISBN: 0 629 87614 2 (2006).
- [7] Maamar Nakib, Ahmed Kettab, Ali Berreksi & Laila Mandi (2014): Study of the prospects for agricultural utilization of sludge produced from WWTPS in North Central Algeria, Desalination and Water Treatment, DOI: 10.1080/19443994.2014.926260.
- [8] WHO, 1989. Health guidelines for the use of wastewater in agriculture and aquaculture. World Health Organization, Guidelines, 76 pp.
- [9] Ayers R.S., Westcot D.W. (1989)., Water quality for agriculture, FAO Bulletin of Irrigation and Drainage, No. 29, Food and Agriculture Organization of the United Nations, Rome. Rev. 1, 174pp. M-56 ISBN 92-5-102263-1.
- [10] A. Landreau, Reuse of treated wastewater per the soil and subsoil: Fit between the quality of water use and protection of the natural environment, Seminar on wastewater and receiving environment, Casablanca, Morocco, 1987, pp. 1–13.
- [11] H. El Haite, Treatment wastewater by reservoirs operational and reuse for irrigation, Doctoral Thesis, Superior National School of Mines of Saint-Etienne, 2010.
- [12] Soltner, 2005- The basics of plant production. Tome 3. 6th edition. Sci and Tech Agr. 49310. Sainte Gene on the Loire. France.
- [13] B. Catherine, H. Alain, M.H. Jean, Treatment technologies a view to reuse of treated wastewater (RWWT), Final report, Partnership convention ONEMA-Cemagref, 2009.
- [14] J.R. Tiercelin, A. Vidal, Treaty of Irrigation, 2nd ed., TEC and DOC, Lavoisier, 2006.
- [15] Metahri Med S, simultaneous elimination of nitrogen and phosphate pollution of treated wastewater by mixed process. Case of the WWTP East of city Tizi Ouzou, Doctoral thesis, University of Tizi Ouzou, 2012.
- [16] FAO, Irrigation with treated wastewater: Operating manual, regional office for the near East and North Africa, Cairo, Egypt, 2003.
- [17] J.A. Faby, F. Brissaud, The Use of Treated Wastewater in Irrigation. International Office of Water, 1997.
- [18] S. Baumont, J.-P. Camard, A. Lefranc, A. Franconi, Wastewater Reuse: Health risks and feasibility in Isle of France. Report ORS, 2004.